

VULKEM® EWS DECORATIVE WATERPROOFING SYSTEM

For applications requiring a waterproof, aesthetically-pleasing finish

Product Overview

Tremco® decorative waterproofing systems deliver superior performance using polyurethane methacrylate (PUMA) technology. This unique chemistry prevents the degradation of deck surfaces from foot traffic and frequent exposure to the elements compared to typical MMA and polyurethane systems.

Our decorative waterproofing systems are ideal for pedestrian walkways, balconies, deck and plaza common areas and can match any aesthetic with a variety of approved UV-stable aggregate or chips. Our seamless systems are applied over the structural slab and eliminate the additional labor, time and cost associated with split-slab waterproofing that is covered with topping slabs, tile, paver systems or stamped concrete.

Features & Benefits

- Premium waterproofing system backed by an all-inclusive warranty
- Aesthetically-appealing waterproofing with a variety of finish options
- Seamless, monolithic membrane creates an even surface
- Extreme durability with exceptional crack-bridging characteristics, eliminating the need for reinforcing fabric
- Open to foot traffic within one hour after application
- Can be applied in temperatures as low as 14°F (-10°C)
- Zero volatile organic compounds (VOCs)
- Compatible with approved Tremco sealants, Vulkem coatings and ExoAir® membranes




Vulkem® EWS Decorative Waterproofing System Application



Vulkem® EWS Decorative Waterproofing System

| PRODUCT | COVERAGE RATE | WET MILS | COMMENTS |
|-----------------------|-------------------------------|----------|--|
| 1: Tremco PUMA Primer | 90 ft ² /gal | 17 | Lightly broadcast silica sand. |
| 2: Tremco PUMA BC | 20 ft ² /gal | 80 | Allow 45 min to cure before proceeding. |
| 3: Tremco PUMA WC | 80 to 90 ft ² /gal | 17 to 20 | Broadcast UV-stable color quartz to refusal. Allow 45 min to cure before proceeding. |
| 4: Tremco PUMA WC | 60 to 80 ft ² /gal | 20 to 25 | Broadcast UV-stable color quartz to refusal. Allow 45 min to cure before proceeding. |
| 5: Tremco PUMA TC | 107 ft ² /gal | 15 | Allow 45 min to cure before proceeding to traffic. |
| 6: Tremco PUMA TC | 107 ft ² /gal | 15 | Allow 45 min to cure before proceeding to traffic. |

Coverage rate information and selected aggregate may vary by region or project. For specific information, please reference the application instructions or contact your local Tremco representative.

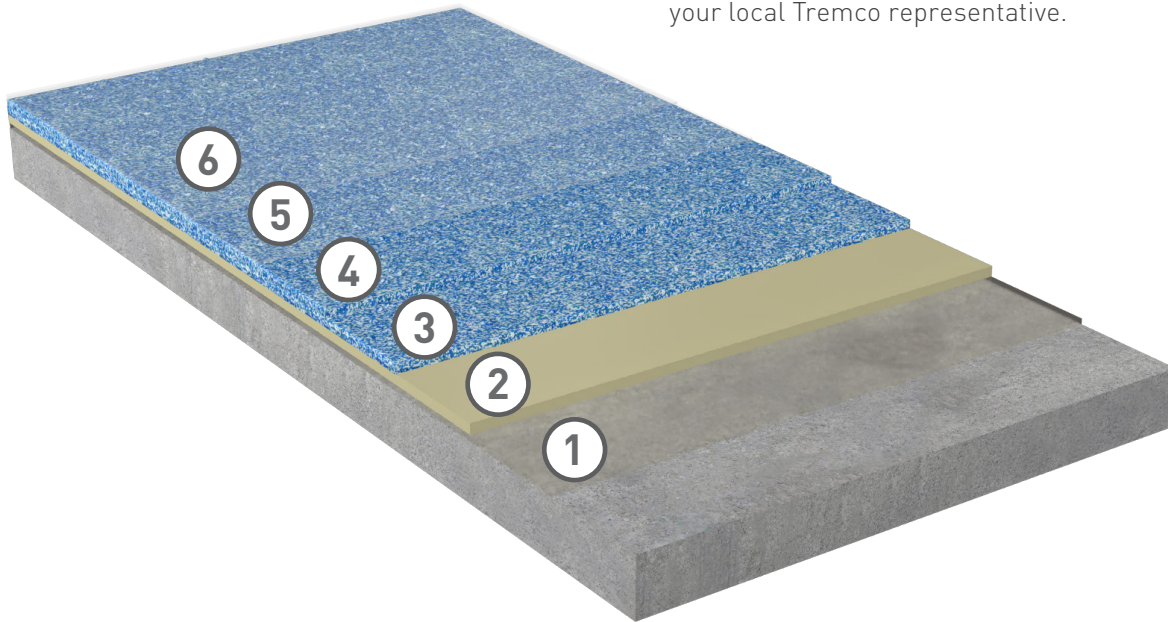

Peace of Mind Guarantee

Our all-inclusive warranties provide confidence that your project's systems are backed by a company with more than 85 years' experience, success and proven performance in the industry. Tremco warranties are available to include seamless connections to adjacent building enclosure components to create single-source, warranted, tested systems.

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.



Tremco®, Vulkem® and ExoAir® are registered trademarks of Tremco Incorporated. Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.

1220/EWSDSS

tremcocpg.com