



PEDESTRIAN COATINGS Vulkem® 350NF / 351

STANDARD

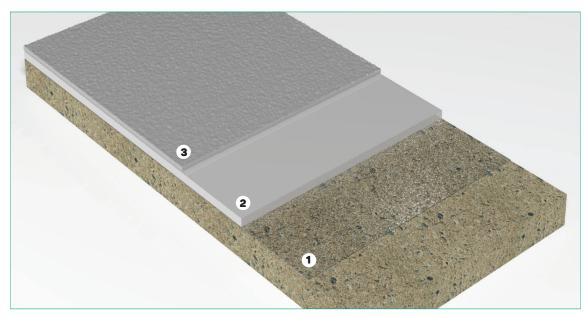

| | Product | Coverage Rate | Min. Wet Mil | Comments |
|---|----------------------------------|---------------------|--------------|--------------------------------------|
| 1 | Primer (condition dependent) | .400 to 600 ft²/gal | .N/A | . See local Tremco representative |
| 2 | Vulkem 350NF | .40 ft²/gal | .40 | . See mixing instructions |
| 3 | Vulkem 351 seeded with aggregate | .90 to 115 ft²/gal | .15 | . Unimin 2040 from Junction City, GA |

HEAVY DUTY

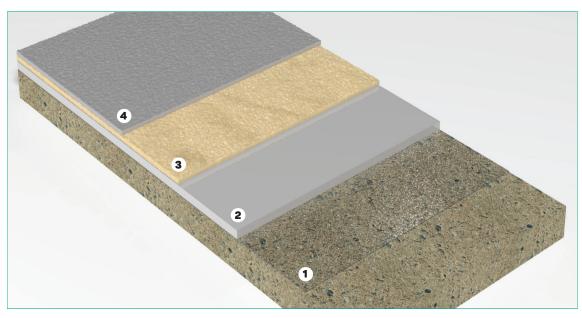

| | Product | Coverage Rate | Min. Wet Mil | Comments |
|---|------------------------------|---------------------|--------------|--------------------------------------|
| 1 | Primer (condition dependent) | .400 to 600 ft²/gal | .N/A | . See local Tremco representative |
| 2 | Vulkem 350NF | .40 ft²/gal | .40 | . See mixing instructions |
| 3 | Vulkem 351 seeded to refusal | 110 to 125 ft²/gal | . 12 | . Unimin 2040 from Junction City, GA |
| 4 | Vulkem 351 | .110 to 125 ft²/gal | .12 | . Pedestrian traffic after 24 hours |