

Tremco offers a broad selection of waterproofing systems for a variety of applications.

TREMproof® Dual Waterproofing System (DWS)

Basic uses

- Backfilled walls
- Split slab appllication
- Planters
- Terraces
- Plaza decks
- Under paver systems


Benefits

- Dual system provides the ultimate choice in waterproofing protection
- Can be applied in as little as 24 hours following the removal of concrete forms
- Can be applied to damp concrete reducing the delays associated with rain or other sources of moisture
- Cold-applied application minimizes use of specialized equipment
- Low Volatile Organic Compounds (VOCs)
- Proven Performance

HEAVY DUTY SYSTEMS

TREMproof® Dual Waterproofing System (DWS)



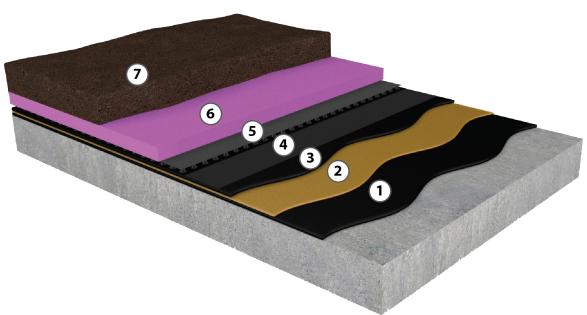

1	Product TREMproof 250GC	Coverage Rate . 18 ft²/gəl		Comments . Applied in one lift
2	Vulkem #191 QD	. 400-450 ft²/gal	N/A	. Allow to cure, but must be tacky before the next layer is applied
3	TREMproof 250GC	. 50 ft²/gal	30	. Applied in one lift
4	TRA Sheeting	. N/A	N/A	. TRA Sheeting is fully embedded immediately into uncured TREMproof 250GC
5	TREMDrain Drainage Series	. N/A	N/A	. Consult your local Tremco representative for product recommendation
6	Insulation	. N/A	N/A	. As specified
7	Overburden	. N/A	N/A	. As specified