




## TR-16016S 40 Durometer Dense Translucent Silicone

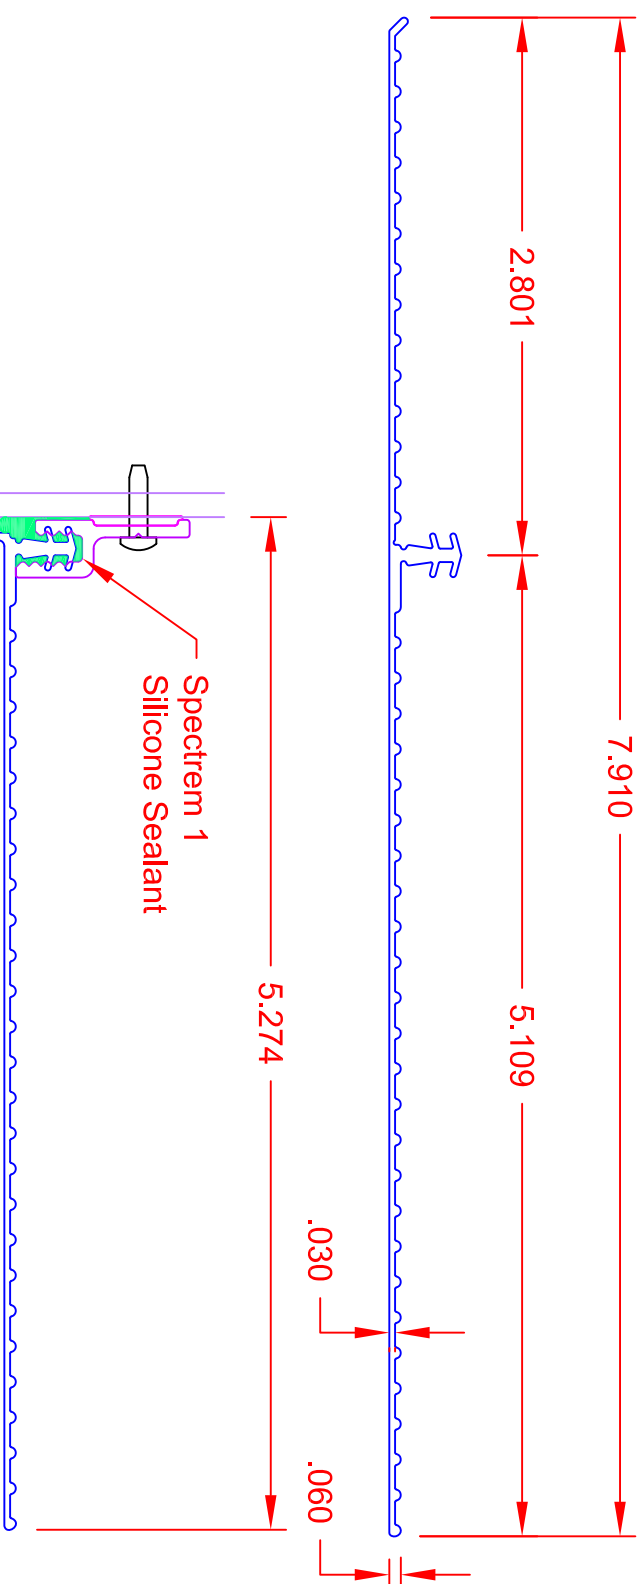

Off-Set dart designed is able to seal air/moisture from entering the glazing pocket.

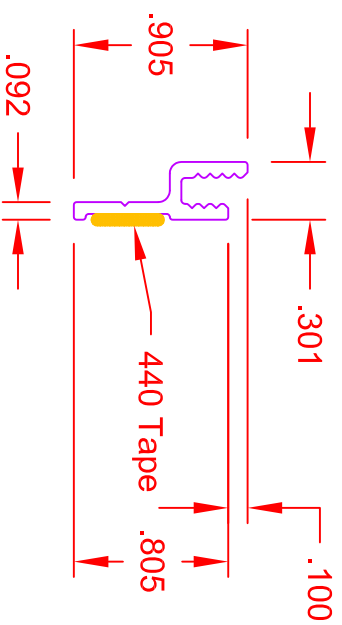

**Extruded Aluminum Adaptor TR-152265**  
**Cut 60 Inches Long with 3/16" Diameter Hole 6 Inches O.C.**  
**Tremco 440 Butyl Tape 1/6" X 3/8" Pre-Applied**

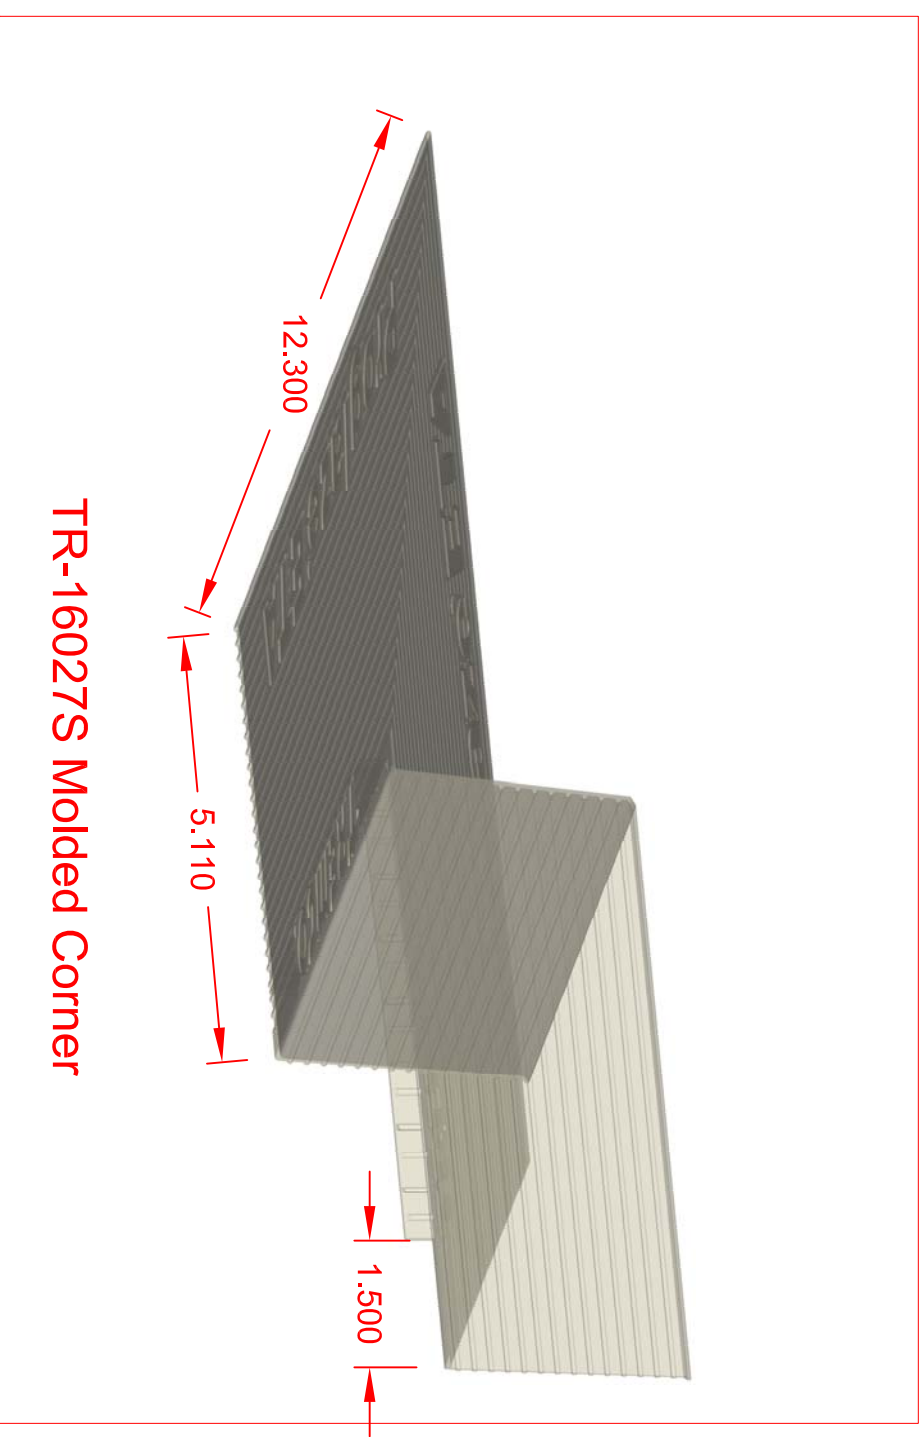

**TR-16027S Molded Corner**

For Typical Application Details Refer to Concept Drawing 07121

The above details and related information are provided solely as a courtesy to installers using the Proglaze ETA System and may be updated or modified by Tremco without notice. Consult Tremco to ensure that you are reviewing current information. Because building codes, climate considerations and other site conditions may vary from project to project, Tremco details are not intended to provide exhaustive coverage of all issues that may be encountered on a particular project and/or that may affect Proglaze installation procedures and/or performance. Building owners and installers should consult and follow the published recommendations of wall, window and door manufacturers, as applicable, with respect to proper attachment of the Proglaze ETA System.

The design of the gasket shown herein is the product of Tremco Incorporated. No reproduction or use of this design is authorized without the consent of Tremco Incorporated.

No.	Date	Description	By
Customer: <b>TREMCO</b>			
Project: <b>Proglaze ETA - System 2</b>			
Drawn by:	P Poirier	Scale:	<b>FULL</b>
Date:	7/14/2008	Drawing No.:	<b>08077</b>
<b>TREMCO</b> <small>SEALANT / WEATHERPROOFING DIVISION</small> 1451 Jacobson Ave Ashland, Ohio 44805 U.S.A.		Phone : 800-321-6357 Fax : 419-289-6645	
Customer Part No.:			