

Backfilled Side of Wall

Inside of Wall

TREMDrain 1000 (applied at non-submerged conditions only)

Paraseal GM/LG 60 Mil with bentonite side against concrete

One (1) type 316 S/S worm-drive hose clamp minimum 1/2" wide x 0.030" thick


Pipe penetration

Dymonic 100

Para JT Tape

Paraseal GM/LG 60 Mil Collar, heat welded to Paraseal GM/LG

Paraseal Collar must fit snug around pipe without folding. Para JT Tape must be used to completely seal between boot and pipe. Tighten hose clamp as tight as possible without damaging the boot.

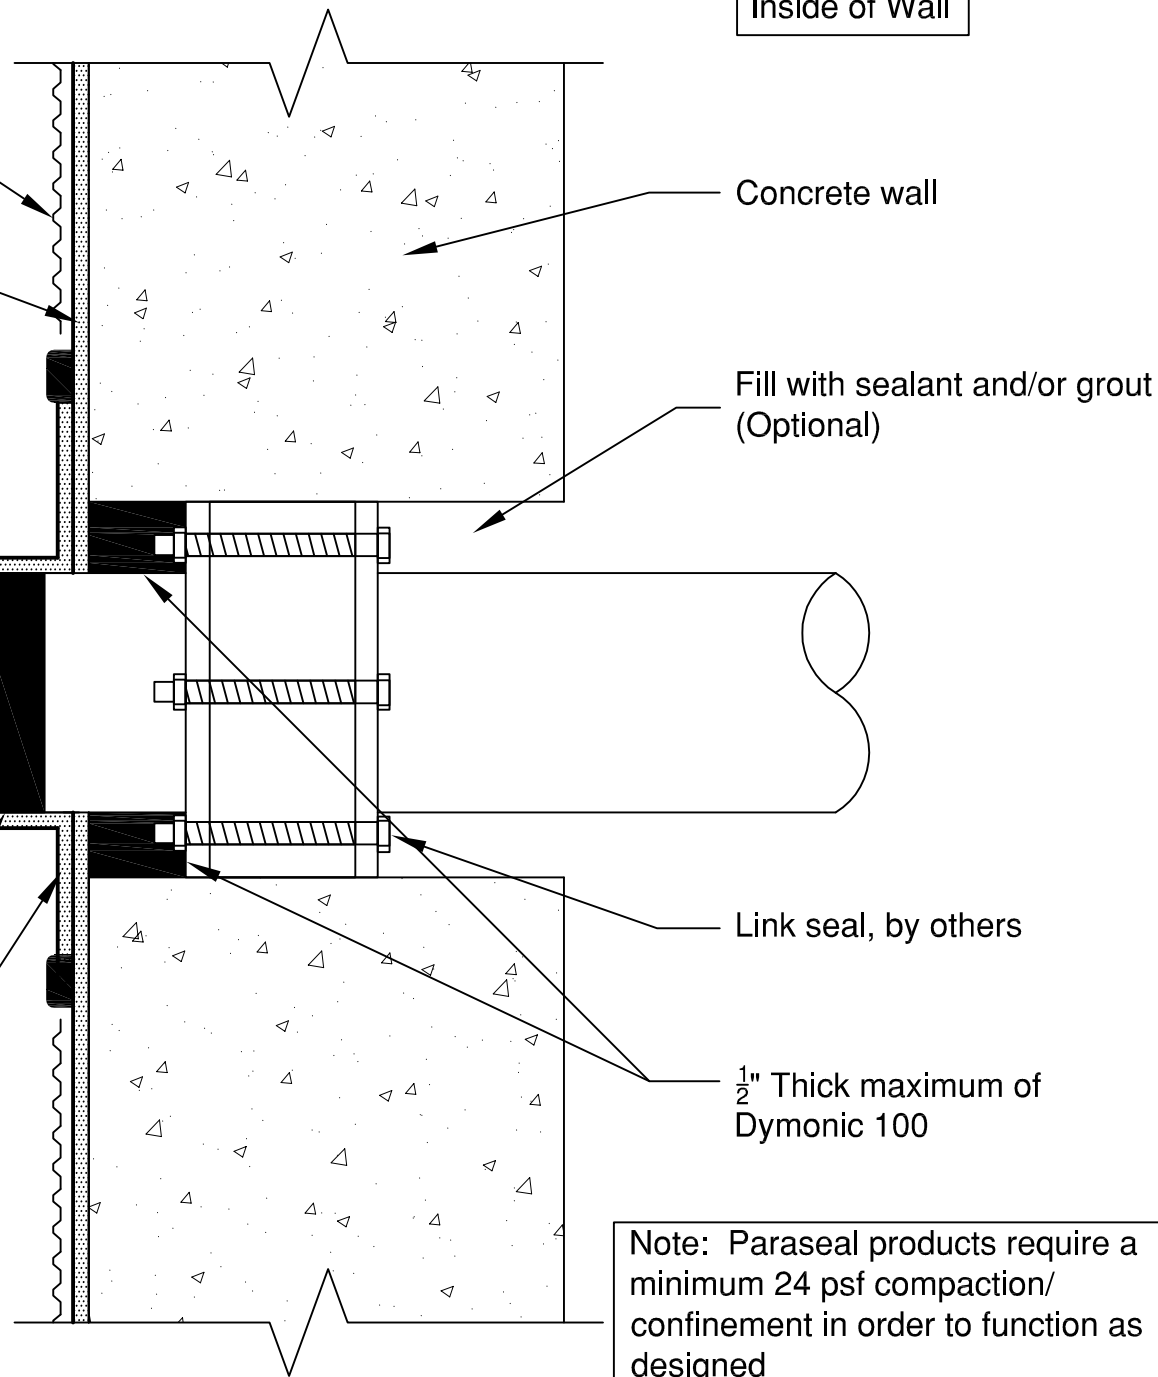

Note: Paraseal products require a minimum 24 psf compaction/ confinement in order to function as designed

Rev #		1	
File Name:		10828	
Sheet Number:		7/29/2009	
Project: Paraseal GM/LG 60 Mil		Scale: None	
Detail: Link Seal Detail - Backfilled Wall Application		Checked by: xxx	
Drawn by: KT			
 <a href="http://www.tremcosealants.com">www.tremcosealants.com</a> 3735 Green Road * Beachwood, OH 44122 Phone : 866-209-2404 * Fax: 216-766-5535			

This detail is intended for conceptual purposes only. Detail must be reviewed by a project/design professional. See [www.tremcosealants.com](http://www.tremcosealants.com) for the most up-to-date product information.

1	3/5/2014	Update Detail	KAB
Rev	Date	Description	By