


DRAIN STRAINER

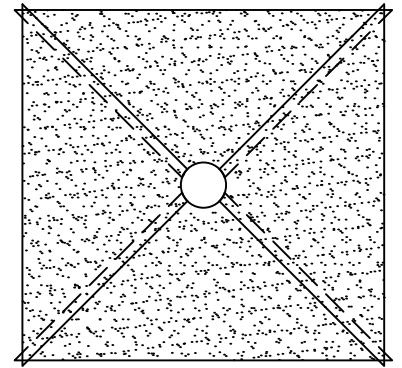

CUT REINFORCEMENT INTO TRIANGLES
AND OVERLAP INTO BOWL.

CLAMPING RING

DECK CLAMP

EXTEND LIQUID APPLIED
SYSTEM INTO DRAIN

CAST-IRON DRAIN BOWL - CLEAN
TO BRITE METAL AND PRIME

LIQUID APPLIED
REINFORCED FLASHING

ROOF DECK PROPERLY SUPPORTED AT DRAINS.
ROOF DRAIN HEIGHT FROM DECK MAY VARY.

LIQUID APPLIED REINFORCED BASE COAT

NOTES

1. THE USE OF A METAL DECK SUMP PAN IS NOT RECOMMENDED. HOWEVER, DRAIN RECEIVER/BEARING PLATES ARE APPLICABLE WITH SOME PROJECTS.
2. THE DESIGNER SHOULD CONSIDER INSULATING THE DRAIN COMPONENTS BELOW THE DECK TO PREVENT POTENTIAL CONDENSATION.
3. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.



SHEET TITLE:

ROOF DRAIN FULLY
REINFORCED OVER CONCRETE

SCALE:

NTS

DRAWING No.:

DWG NO. LA-CFR-24