BENEFITS

- Engineered Framing System
- Designed for direct contact with concrete
- Non-corrosive to Metals
- Insect & fungus resistive
- Will not cup, twist or warp or curl
- Environmentally friendly
- Consistent and STRAIGHT material
- Easily attach future building components



WHY CHOOSE US?

OUR TREATED LSL ENGINEERED FRAMING SYSTEM IS:



- Customizable
- Saves money on labor
- Designed for direct contact with concrete
- Non-corrosive to metals
- Insect & fungus resistent
- Structurally cannot warp, cup or curl
 - Environmentally friendly

Contributes to LEED points

CONTACT US

- 🔀 sales@prebuckproducts.com
- 🔀 PreBuckProducts.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.; PreBuck LLC


Tremco© and Prebuck LLC (2021) © is a registered trademark of Tremco Incorporated. Use of the © symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office. 2021/PreBuck

Tremco Commercial Sealants & Waterproofing 3735 Green Road Beachwood, OH 44122 US: 800.852.9068 | CAN: 800.363.3213 tremcosealants.com

tremcocpg.com



Construction Products Group

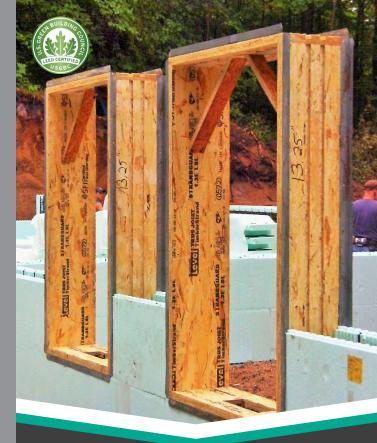

Prebuck[™]

BUCK FRAMES

TREATED LSL ENGINEERED FRAMING SYSTEM

Customizable Easy Install 25 Year Warranty

PREBUCKPRODUCTS.COM



CUSTOMIZABLE & EASY TO INSTALL

- Custom manufactured to any wall dimension
- Self aligns on the wall which makes for easy install, cutting days (even weeks!) off installation time

OUR DESIGN

The dovetail concrete keyways internal design allows for maximized attachment, and integrates the frame system into the ICF concrete wall. Buck Frames also eliminate air infiltration and are non-obstructive with ICF web.



Our metal galvanized flange system allows for ICF bracing and building components to attach flush to the wall surface and supports ICF during concrete pour.





STRONGER. FASTER. SMARTER.

- Product will not delaminate, become spongy or loosen fastener strength
- AWPA standards for use category 2 (uc2)
- Contributes to LEED points
- NAHB National Green Building Certified
- 25-year limited warranty



